
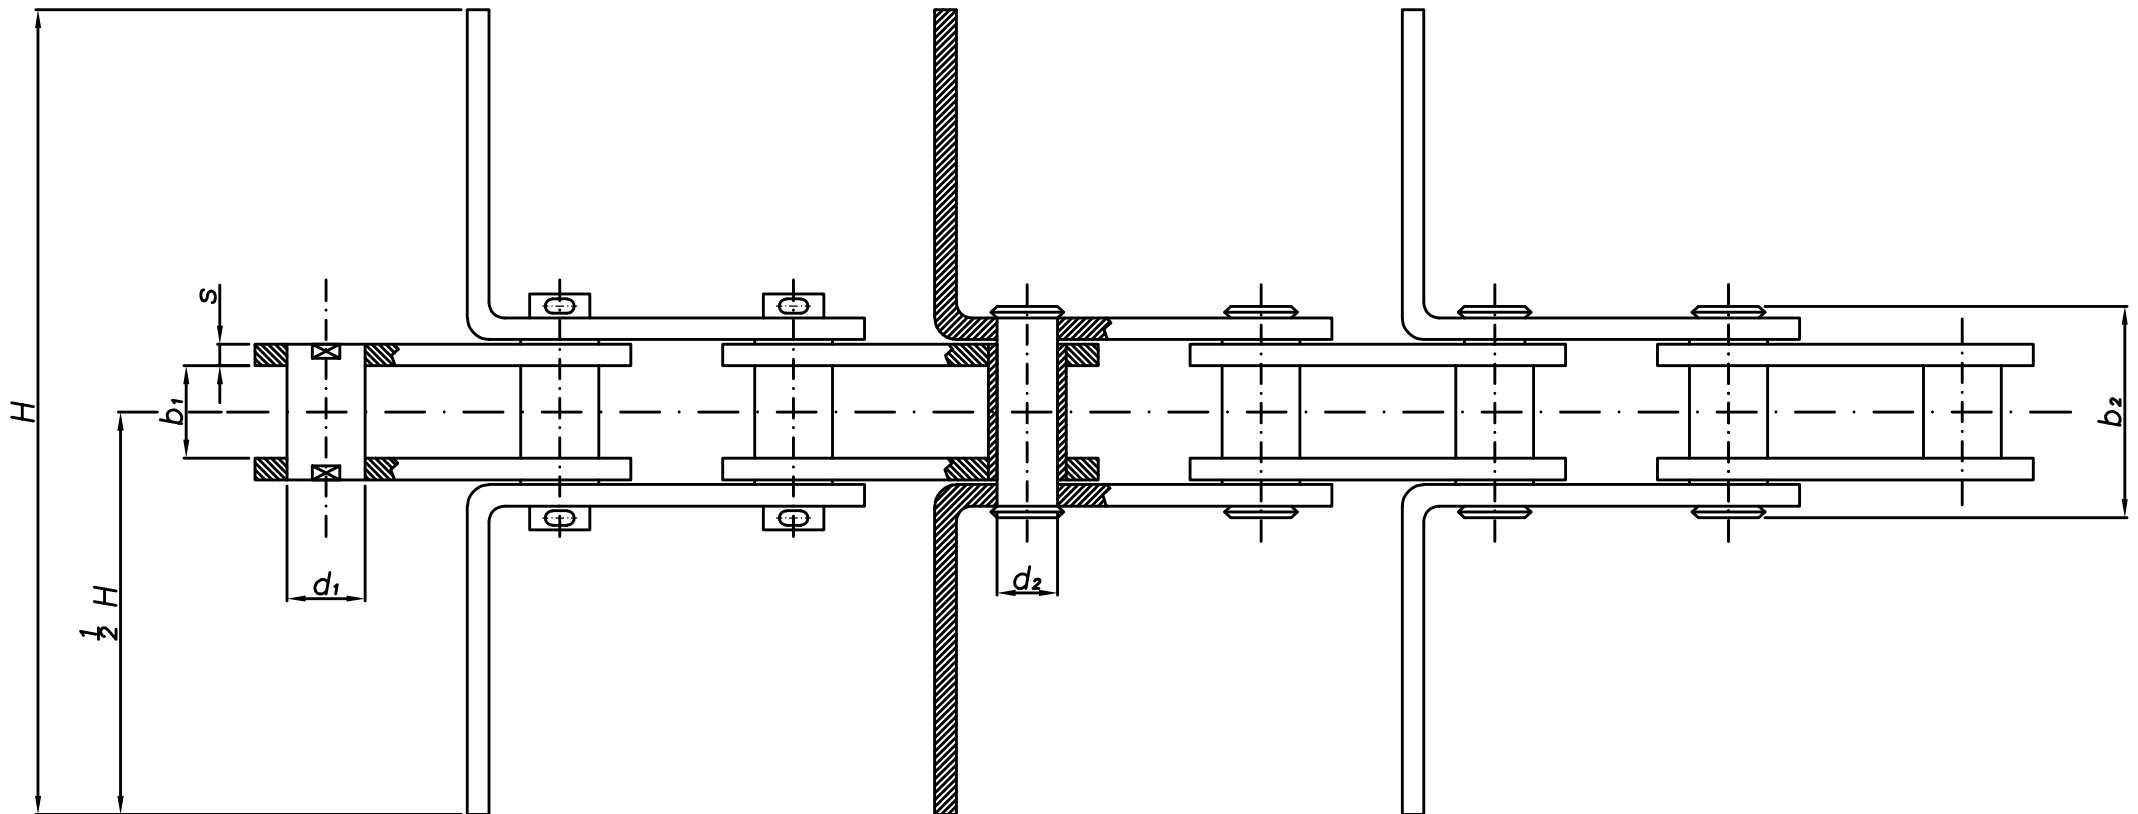


Łańcuchy do Redlera typ FVR  
Scraper conveyor chains type FVR  
DIN 8165

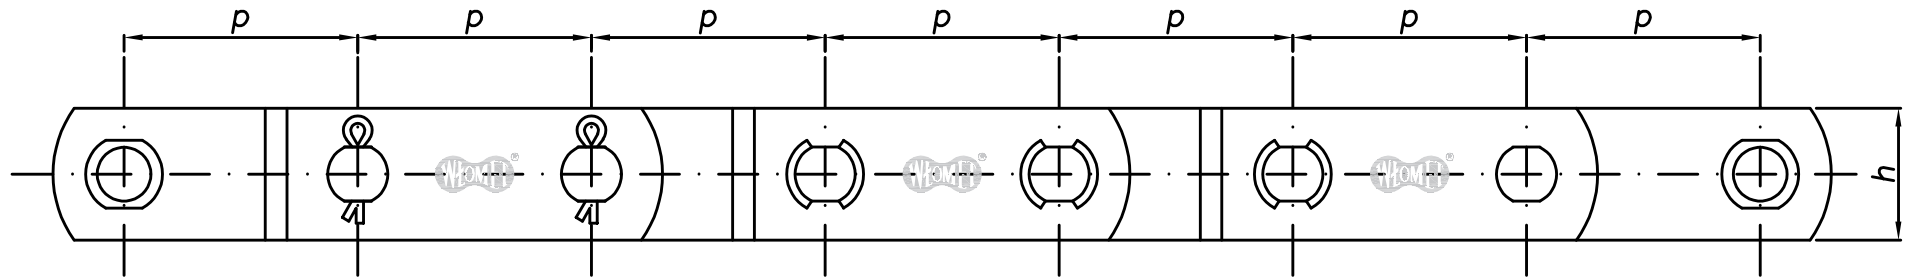

# Łańcuchy do Redlera typ FVR

## Scraper conveyor chains type FVR

### DIN 8165

	p						b <sub>1</sub> min	b <sub>2</sub> max	b <sub>3</sub> max	d <sub>1</sub> max	d <sub>2</sub> max	s min	h max	H	F min	
	mm						mm	mm	mm	mm	mm	mm	mm	mm	mm	kN
1	2						3	4	5	7	8	10	11	12	13	
FVR 40	40	63	100	-	-	-	18,00	36,00	43,00	15,00	10,00	3,00	26,00	Według zamówienia. According to order.	42,00	
FVR 63	63	100	125	160	-	-	22,00	44,00	54,00	18,00	12,00	4,00	30,00		64,00	
FVR 90	63	100	125	160	200	250	25,00	52,00	61,00	20,00	14,00	5,00	35,00		100,00	
FVR 112	100	125	160	200	250	-	30,00	61,00	70,00	22,00	16,00	6,00	40,00		120,00	
FVR 140	100	125	160	200	250	315	35,00	66,00	79,00	26,00	18,00	6,00	45,00		145,00	
FVR 180	125	160	200	250	315	400	45,00	85,50	99,00	30,00	20,00	8,00	50,00		190,00	
FVR 250	125	160	200	250	315	400	55,00	97,50	113,00	36,00	26,00	8,00	60,00		275,00	
FVR 315	160	200	250	315	400	-	65,00	117,00	130,00	42,00	30,00	10,00	70,00		370,00	
FVR 400	160	200	250	315	400	-	70,00	130,00	148,00	44,00	32,00	12,00	70,00		410,00	
FVR 500	160	200	250	315	400	-	80,00	140,00	160,00	50,00	36,00	12,00	80,00		540,00	
FVR 630	200	250	315	400	500	-	90,00	152,00	169,00	56,00	42,00	12,00	100,00		630,00	

F – obciążenie zrywające (min.)

F – breaking load (min.)