
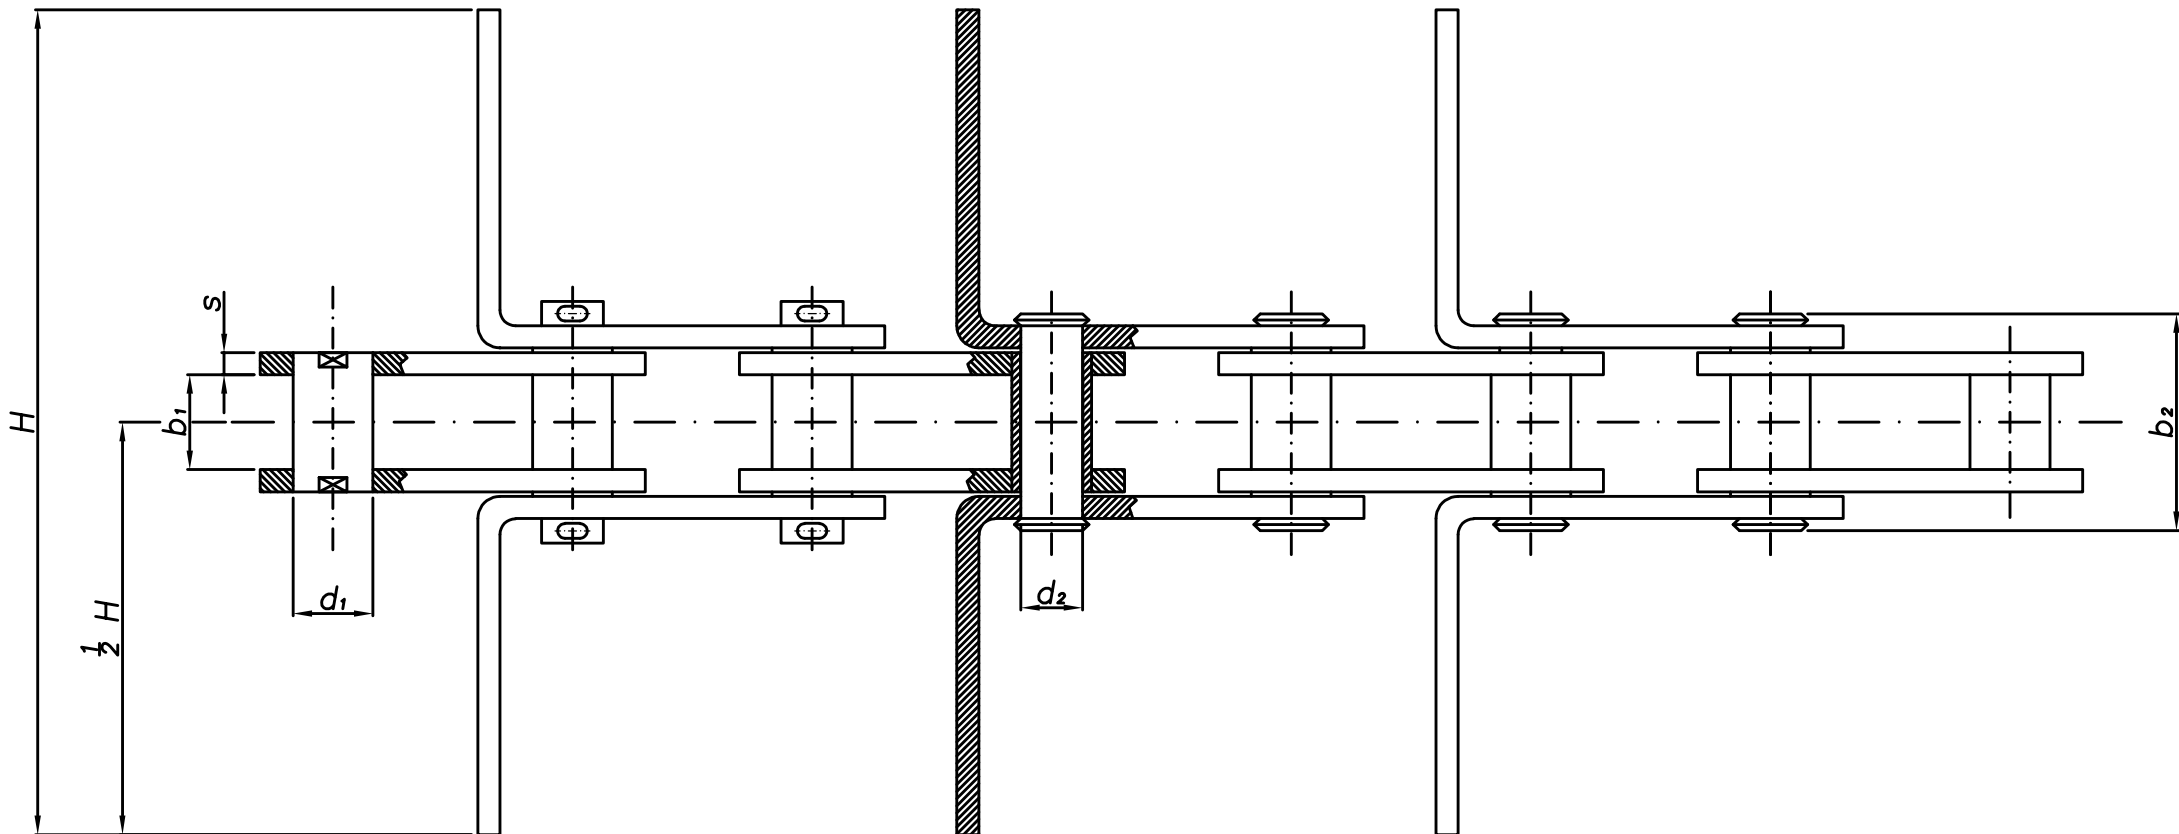


Łańcuchy do Redlera typ MR  
Scraper conveyor chains type MR  
DIN 8167

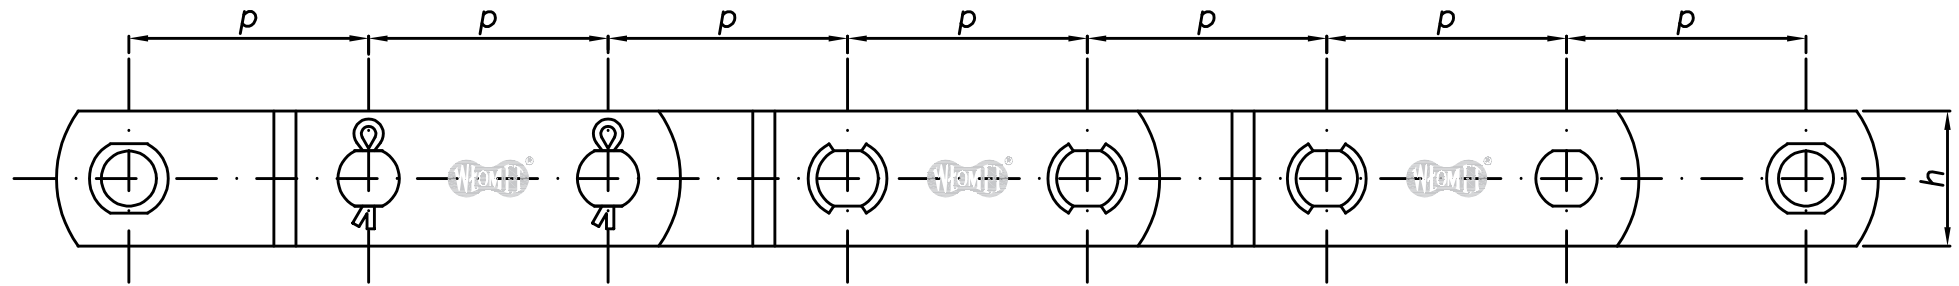

# Łańcuchy do Redlera typ MR

## Scaper conveyor chains type MR

### DIN 8167

	p							b <sub>1</sub> min	b <sub>2</sub> max	b <sub>3</sub> max	d <sub>1</sub> max	d <sub>2</sub> max	s min	h max	H	F min	
	mm							mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
1	2							3	4	5	7	8	10	11	12	13	
MR 20	40	50	63	80	100	125	160	16,00	33,20	38,20	9,00	6,00	3,00	18,00	Według zamówienia. According to order.	20,00	
MR 28	50	63	80	100	125	160	200	18,00	35,20	40,20	10,00	7,00	3,00	20,00		28,00	
MR 40	63	80	100	125	160	200	250	20,00	42,20	49,20	12,50	8,50	4,00	25,00		40,00	
MR 56	63	80	100	125	160	200	250	24,00	47,20	56,20	15,00	10,00	4,00	30,00		56,00	
MR 80	80	100	125	160	200	250	315	28,00	55,20	64,20	18,00	12,00	5,00	35,00		80,00	
MR 112	80	100	125	160	200	250	315	32,00	64,20	75,20	21,00	15,00	6,00	40,00		112,00	
MR 160	100	125	160	200	250	315	400	37,00	77,30	92,30	25,00	18,00	8,00	50,00		160,00	
MR 224	125	160	200	250	315	400	500	43,00	86,30	99,30	30,00	21,00	8,00	60,00		224,00	
MR 315	160	200	250	315	400	500	630	48,00	100,30	120,30	36,00	25,00	10,00	70,00		315,00	
MR 400	200	250	315	400	500	630	800	56,00	117,30	141,30	42,00	30,00	12,00	80,00		450,00	
MR 630	250	315	400	500	630	800	-	66,00	136,30	159,30	50,00	36,00	14,00	100,00	630,00		

F – obciążenie zrywające (min.)

F – breaking load (min.)