


Łańcuchy pociągowe typ MC ze sworzniem rurkowym  
Metric conveyor chains type MC with hollow pins  
DIN 8167

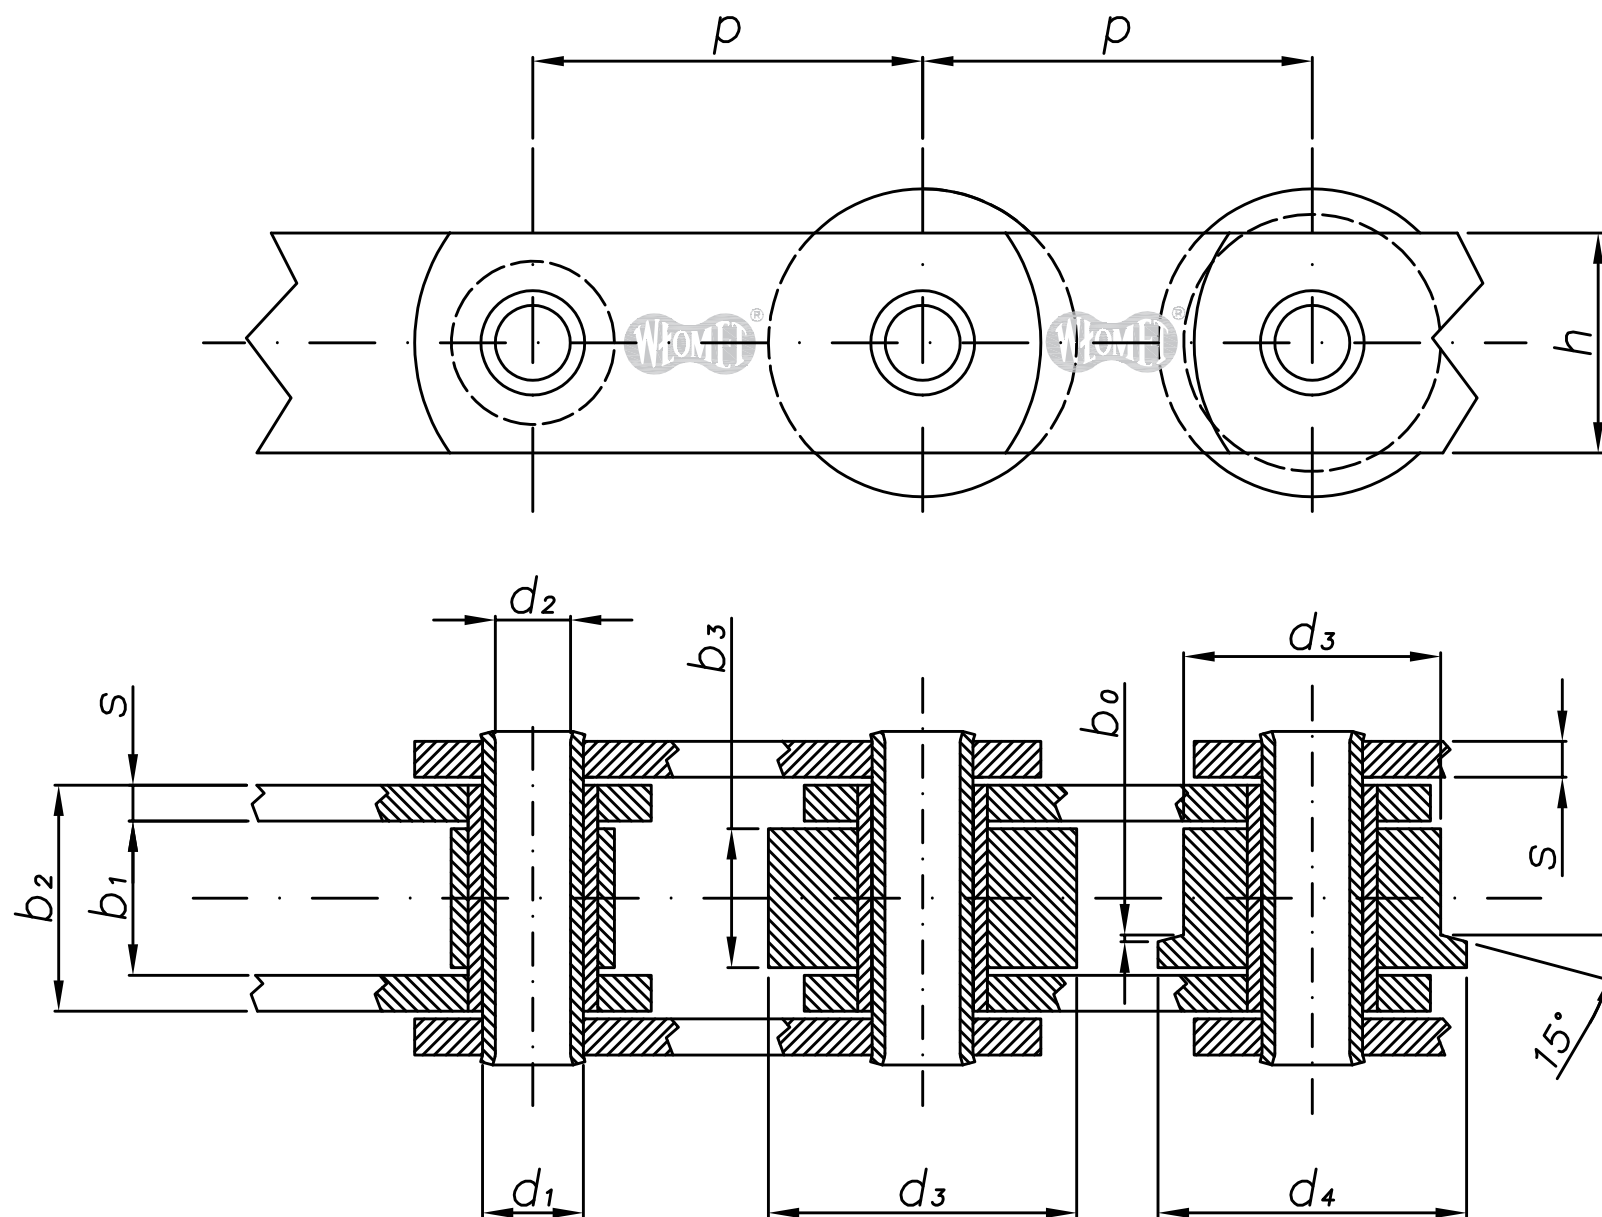

## Łańcuchy pociągowe typ MC ze sworzniem rurkowym

*Metric conveyor chains typ MC with hollow pins*

DIN 8167

	p	d <sub>1</sub> max	d <sub>2</sub> max	d <sub>3</sub> max	d <sub>4</sub> max	b <sub>0</sub> max	b <sub>1</sub> min	b <sub>2</sub> max	b <sub>3</sub> max	s min	h max	F min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN
1	2	3	4	5	6	7	8	9	10	11	12	13
MC 28	63, 80, 100, 125, 160, 200, 250, 315	17,50	8,20	36,00	42,00	4,50	19,00	28,00	42,00	4,00	26,00	28,00
MC 56		21,00	10,20	50,00	60,00	5,00	22,00	33,00	48,00	5,00	36,00	56,00
MC 112		29,00	14,30	70,00	85,00	7,00	30,00	46,00	68,00	8,00	50,00	112,00
MC 224		41,00	20,30	100,00	120,00	10,00	40,00	60,00	90,00	10,00	72,00	224,00

F – obciążenie zrywające (min.)

Przy większych ilościach łańcucha parametry podane w tabeli mogą być indywidualnie zmieniane po uzgodnieniu z klientem.

F – breaking load (min.)

For larger quantities of the chain, the parameters listed in the table can be individually modified by agreement with the customer.