



Łańcuchy rolkowe AH1

Roller chains

PN-77/M-84168, DIN 8188, ISO R606

Seria wzmocniona

Heavy duty series

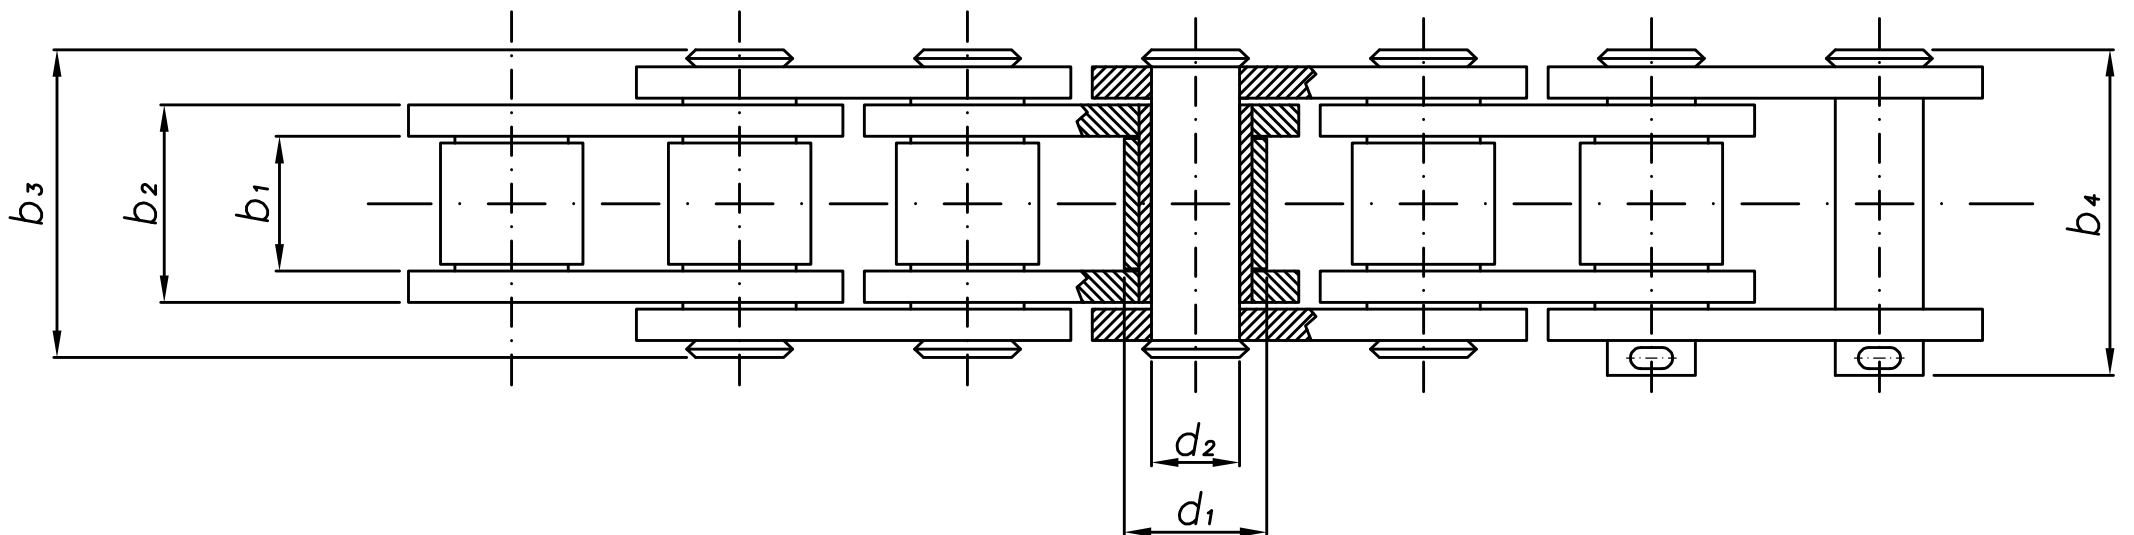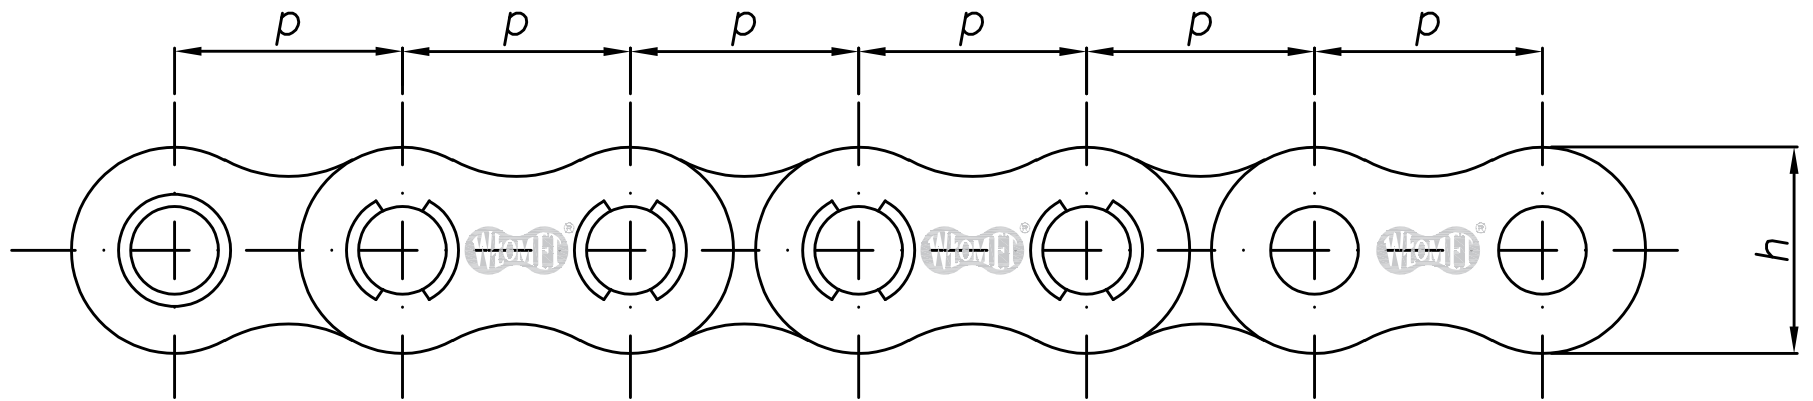

Łańcuchy rolkowe

Roller chains

PN-77/M -84168, DIN 8188, ISO-R606

Seria wzmocniona

Heavy duty series

ISO Nr.	p	d ₁ max	d ₂ max	b ₁ min	b ₂ max	b ₃ max	b ₄ max	h max	F min	Q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
1	2	3	4	5	6	7	8	9	10	11
08 AH1	12,70	7,95	3,96	7,85	11,90	18,80	19,90	12,07	14,20	0,82
10 AH1	15,875	10,16	5,08	9,53	13,84	22,10	23,40	15,09	22,20	1,25
12 AH1	19,05	11,91	5,94	12,70	19,43	29,10	31,50	18,08	31,80	1,80
16 AH1	25,40	15,88	7,92	15,88	24,28	35,90	38,90	24,13	56,70	3,11
20 AH1	31,75	19,05	9,53	19,05	29,10	43,00	45,90	30,18	88,50	4,58
24 AH1	38,10	22,23	11,10	25,40	37,18	53,50	57,20	36,20	127,00	6,53
28 AH1	44,45	25,40	12,70	25,40	38,86	57,20	61,90	42,24	172,40	8,27
32 AH1	50,80	28,58	14,27	31,75	46,88	67,10	72,10	48,26	226,80	10,97
40 AH1	63,50	39,68	19,84	38,10	58,10	86,60	93,50	60,33	353,80	19,16

F – obciążenie zrywające (min.)

Q – masa 1 mb łańcucha

F – breaking load (min.)

Q – weight kg/m