


Łańcuchy rolkowe AH3

Roller chains

PN-77/M-84168, DIN 8188, ISO R606

Seria wzmocniona

Heavy duty series

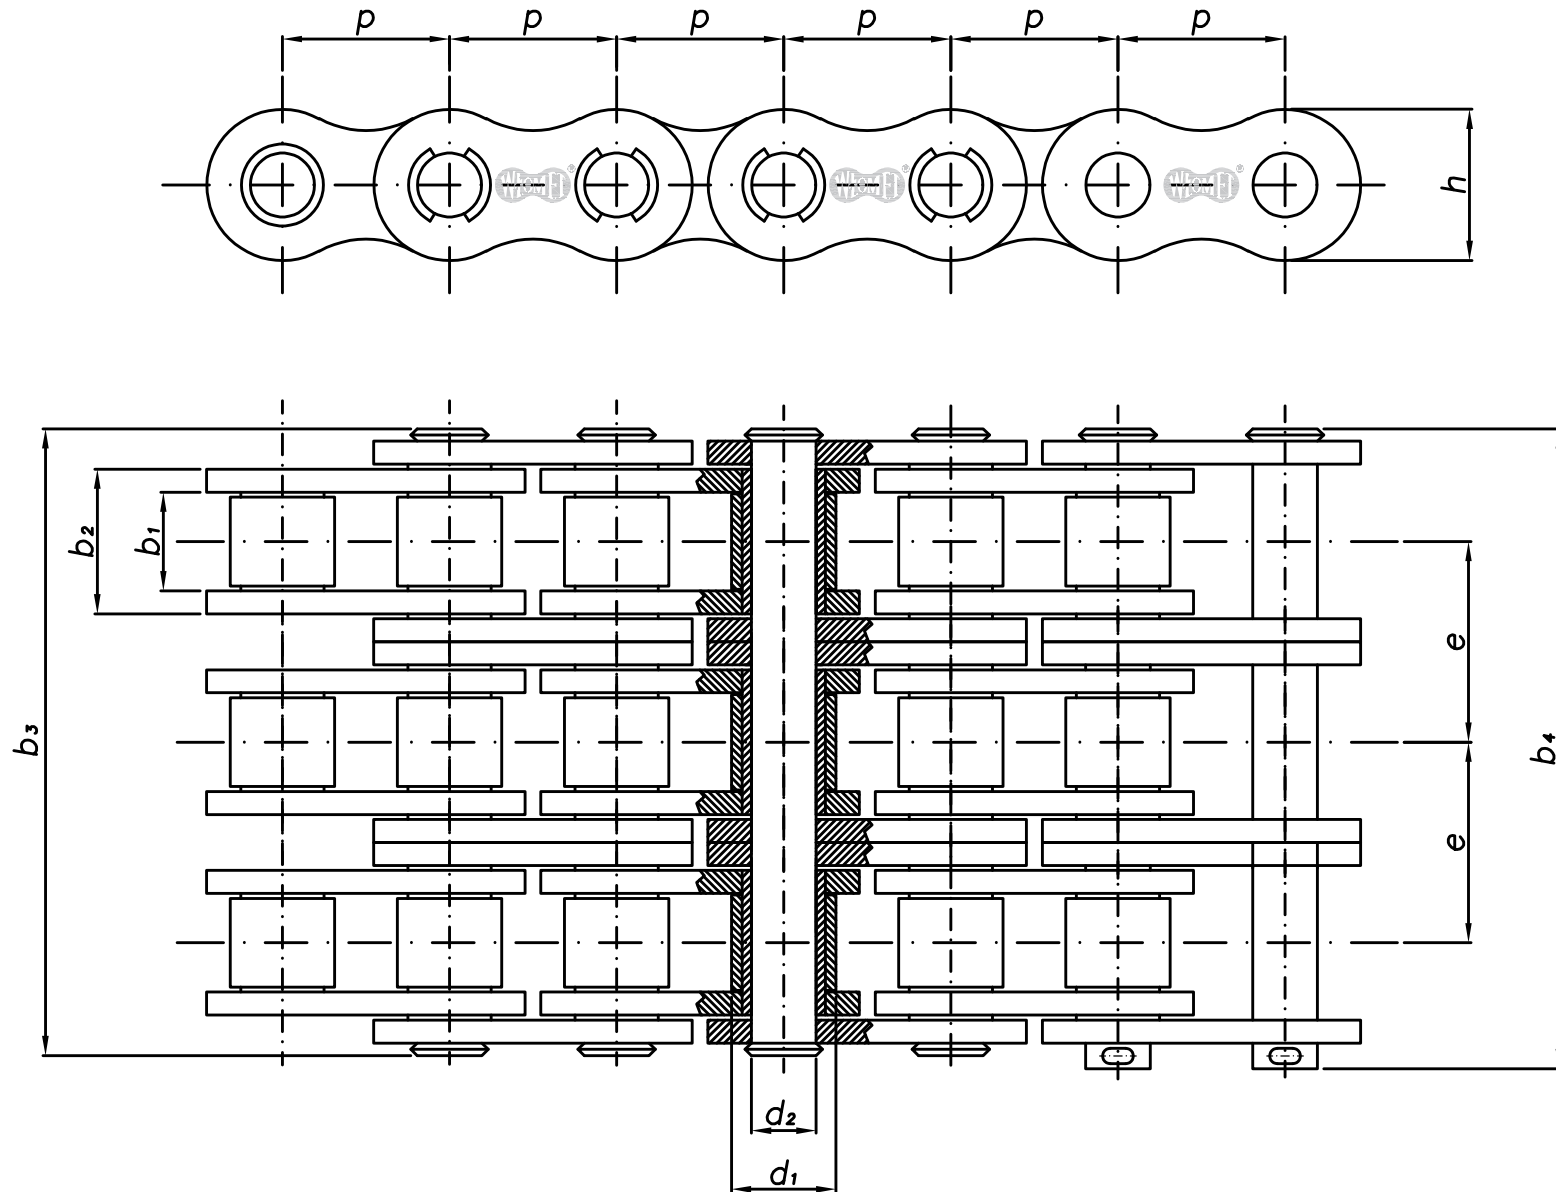

Łańcuchy rolkowe

Roller chains

PN-77/M -84168, DIN 8188, ISO-R606

Seria wzmocniona

Heavy duty series

ISO Nr.	p	d ₁ max	d ₂ max	b ₁ min	b ₂ max	b ₃ max	b ₄ max	e	F min	Q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
1	2	3	4	5	6	7	8	9	10	11
12 AH3	19,05	11,91	5,94	12,70	19,10	81,40	83,20	26,11	95,40	5,54
16 AH3	25,40	15,88	7,92	15,88	23,88	101,40	102,90	32,59	170,10	9,42
20 AH3	31,75	19,05	9,53	19,05	28,65	121,80	125,10	39,09	265,50	12,96
24 AH3	38,10	22,23	11,10	25,40	36,60	151,20	155,20	48,87	381,00	19,64
28 AH3	44,45	25,40	12,70	25,40	38,20	162,00	166,60	52,20	517,20	24,90
32 AH3	50,80	28,58	14,27	31,75	46,15	192,00	196,80	61,90	680,40	30,10
40 AH3	63,50	39,68	19,84	38,10	57,10	243,20	250,10	78,31	1 061,40	57,06

F – obciążenie zrywające (min.)

Q – masa 1 mb łańcucha

F – breaking load (min.)

Q – weight kg/m