


Łańcuchy rolkowe z płytkami wygiętymi
Roller chains with cranked links
DIN 8182

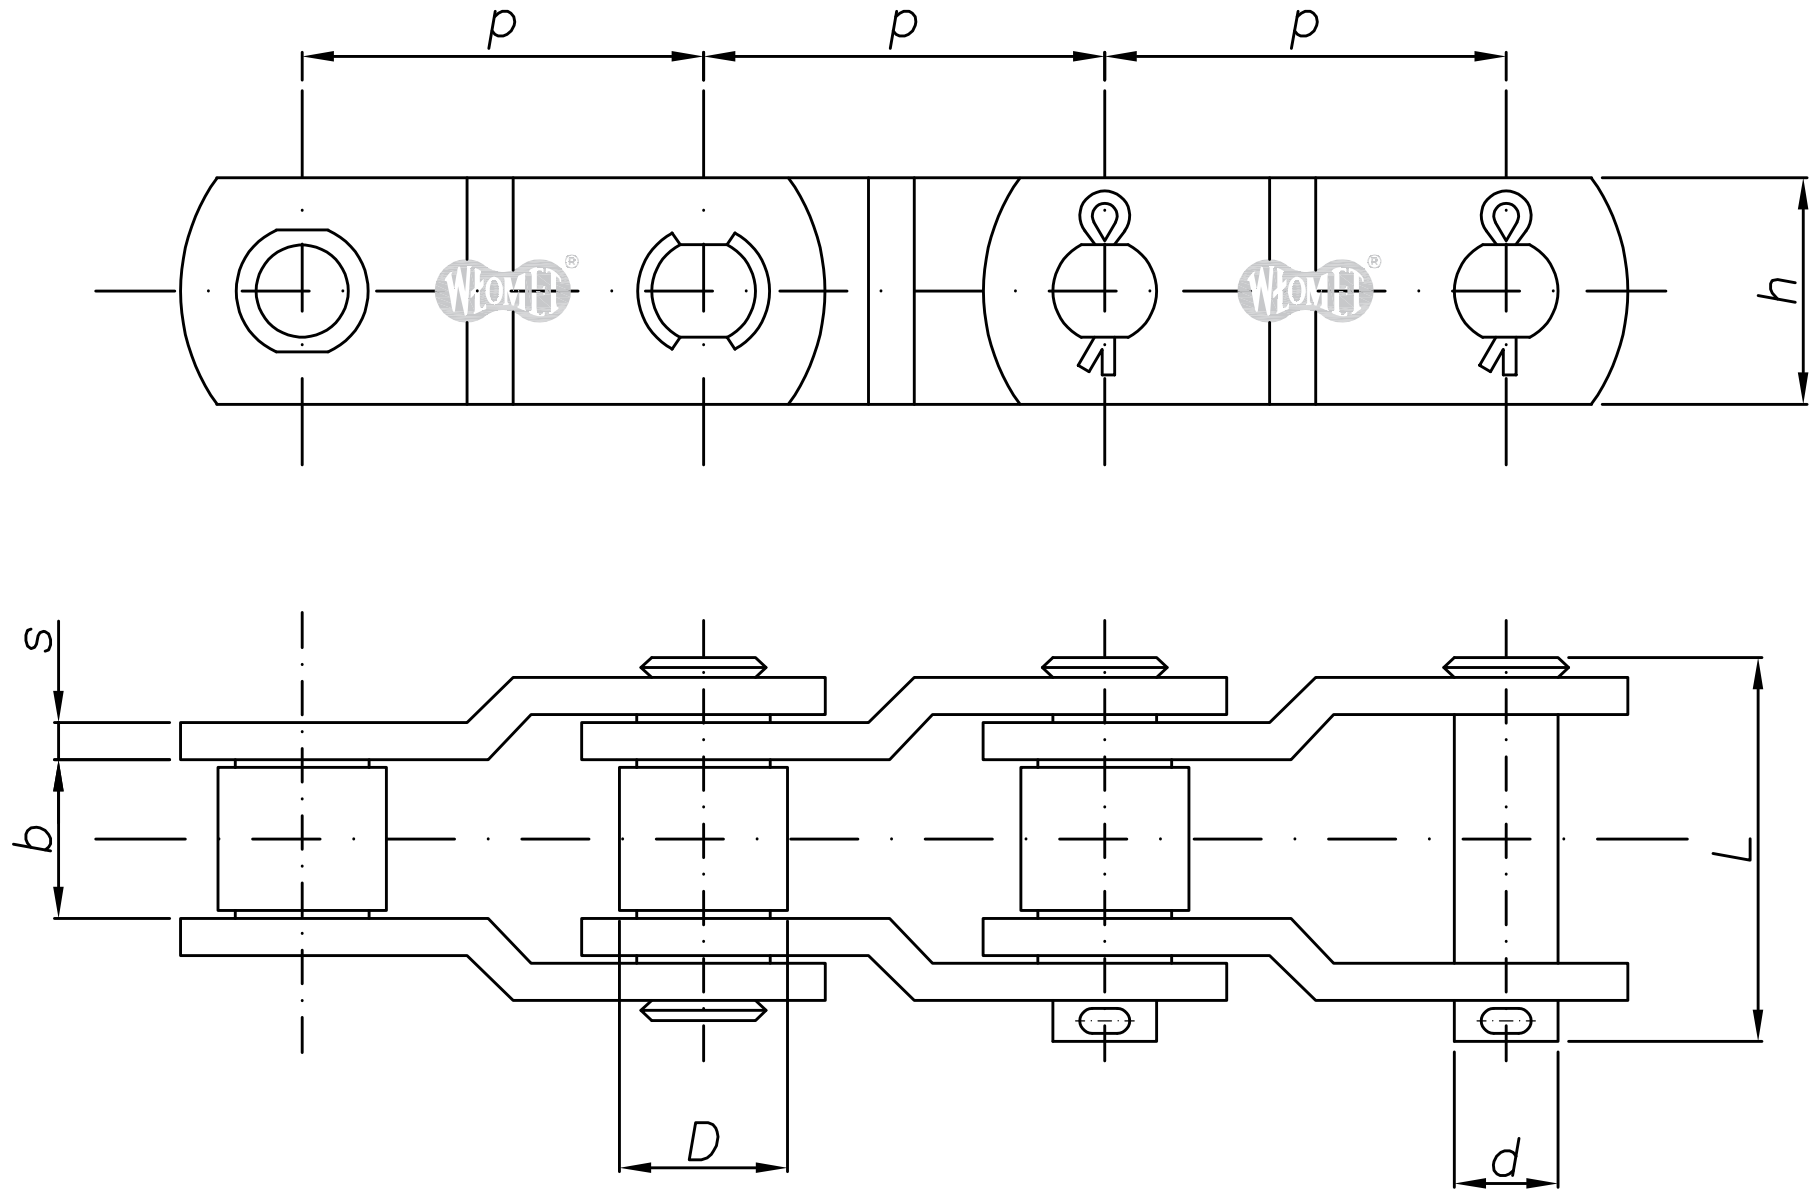

Łańcuchy rolkowe z płytkami wygiętymi

Roller chains with cranked links

DIN 8182

p		D max	d max	b min	s min	h max	L max	F min	Q
mm	"	mm	mm	mm	mm	mm	mm	kN	kg/m
1	2	3	4	5	6	7	8	9	10
77,9	3,067	41,28	19,00	40,00	10,00	60,00	98,00	490,00	19,00
78,1	3,075	33,00	17,00	37,00	10,00	45,00	96,00	340,00	13,00
78,1	3,075	41,00	19,00	37,00	10,00	45,00	96,00	340,00	14,00
78,1	3,075	31,75	17,92	38,10	8,00	45,00	93,00	340,00	12,30
103,2	4,063	46,00	22,00	48,00	12,00	60,00	129,00	680,00	26,40
103,2	4,063	44,45	23,92	49,20	14,00	60,00	129,00	680,70	31,00
103,2	4,063	60,00	23,92	49,20	14,00	60,00	122,00	500,00	24,00
103,4	4,073	45,20	25,40	49,50	14,00	60,00	131,00	771,00	27,20
127,00	5,000	63,50	34,90	64,50	14,00	90,00	168,50	1 700,00	59,00

F – obciążenie zrywające (min.)

Q – masa 1 mb łańcucha

F – breaking load (min.)

Q – weight of 1 metre of chain