
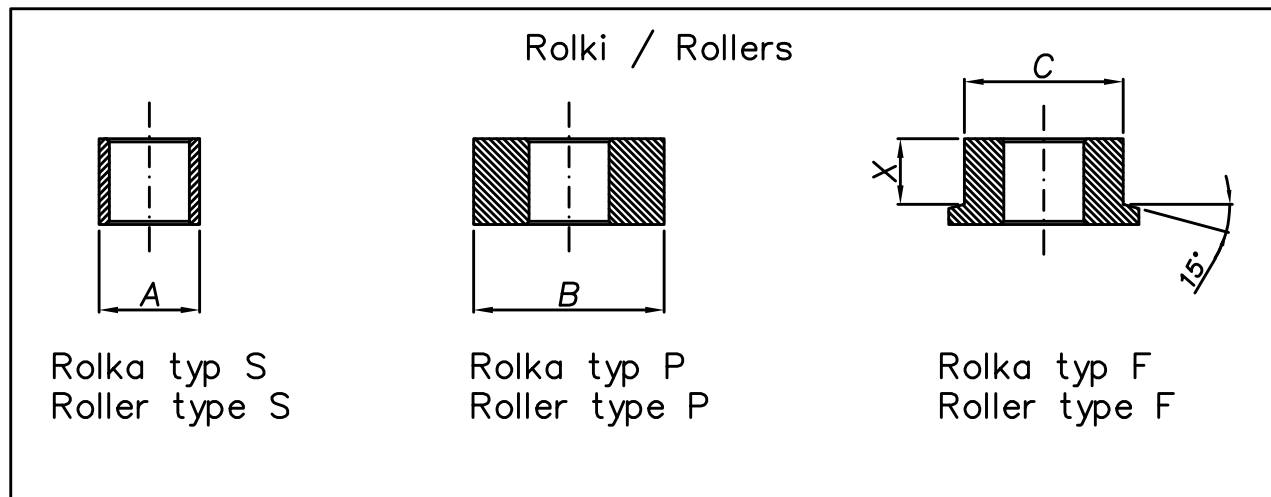


Łańcuchy transportowe typ FV
 Conveyor standard chains type FV
 DIN 8165

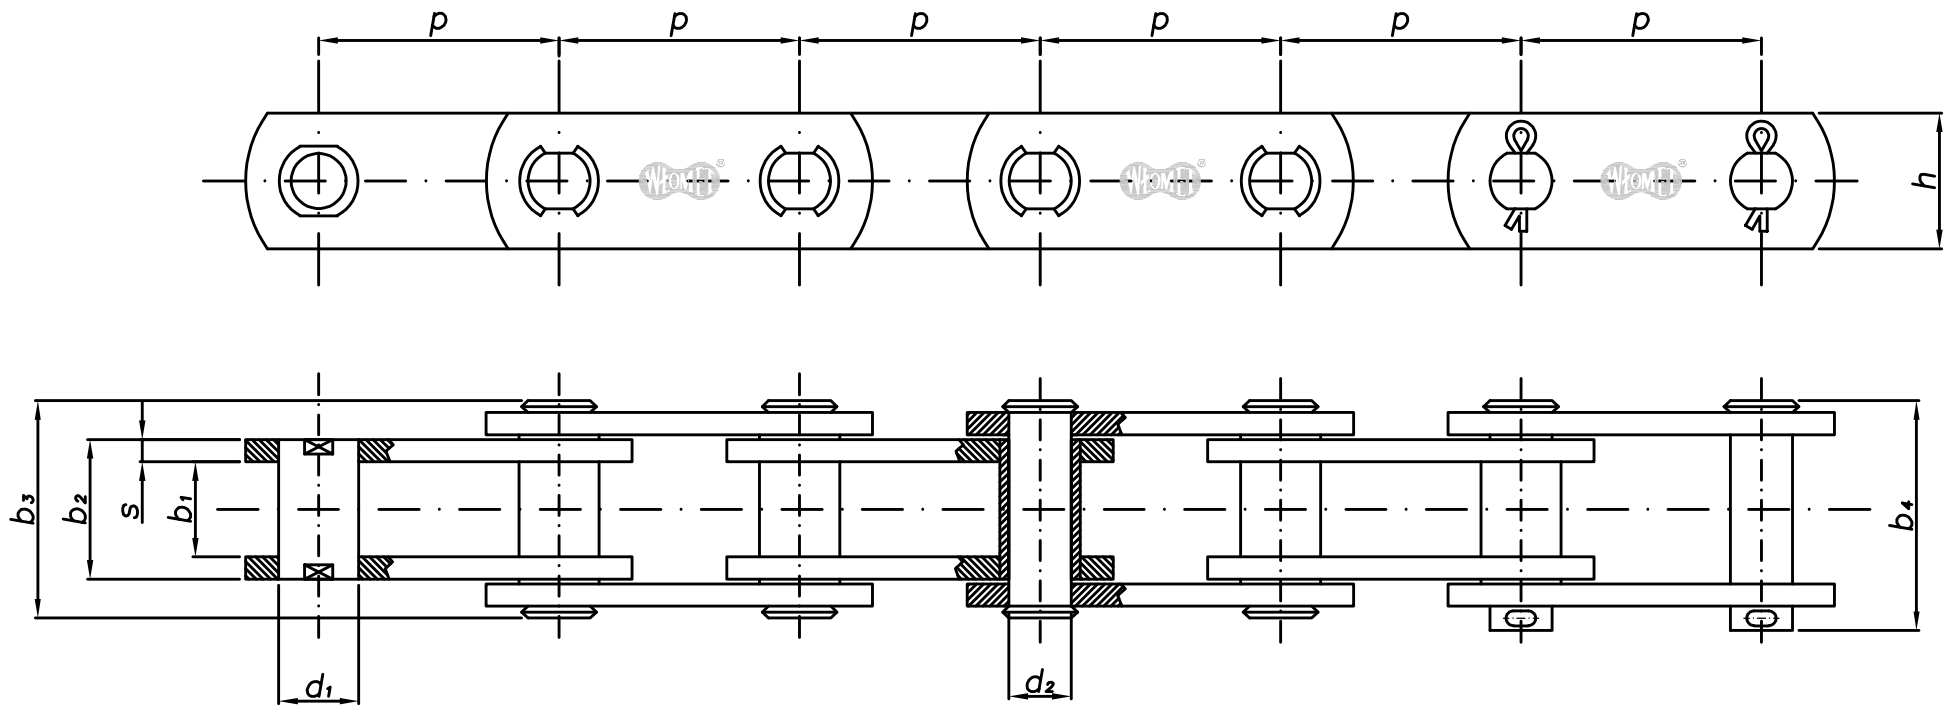

Łańcuchy transportowe typ FV

Conveyor standard chains type FV

DIN 8165

1	p								b ₁ min	b ₂ max	b ₃ max	b ₄ max	d ₁ max	d ₂ max	D max			X	h max	s min	F min	
	mm														A	B	C					mm
1	2									3	4	5	6	7	8	9	10	11	12	13	14	15
FV 40	40	50	63	80	100	125	160	-	18,00	25,00	37,00	40,50	15,00	10,00	20,00	32,00	40,00	12,50	26,00	3,00	40,00	
FV 63	50	63	80	100	125	160	200	-	22,00	31,00	46,00	50,50	18,00	12,00	26,00	40,00	50,00	15,50	30,00	4,00	63,00	
FV 90	50	63	80	100	125	160	200	250	25,00	36,00	53,00	57,50	20,00	14,00	30,00	48,00	63,00	18,50	35,00	5,00	90,00	
FV 112	80	100	125	160	200	250	315	-	30,00	43,00	63,00	67,50	22,00	16,00	32,00	55,00	72,00	22,00	40,00	6,00	112,00	
FV 140	80	100	125	160	200	250	315	400	35,00	48,00	68,00	74,00	26,00	18,00	36,00	60,00	80,00	26,00	45,00	6,00	140,00	
FV 180	100	125	160	200	250	315	400	500	45,00	62,00	86,00	93,00	30,00	20,00	42,00	70,00	100,00	35,00	50,00	8,00	180,00	

F – obciążenie zrywające (min.)

F – breaking load (min.)