


Łańcuchy sworzniowe typ C
Gall's chains type C
PN-74/M-84110, DIN 8150
Sworznie nitowane z podkładkami
With washers

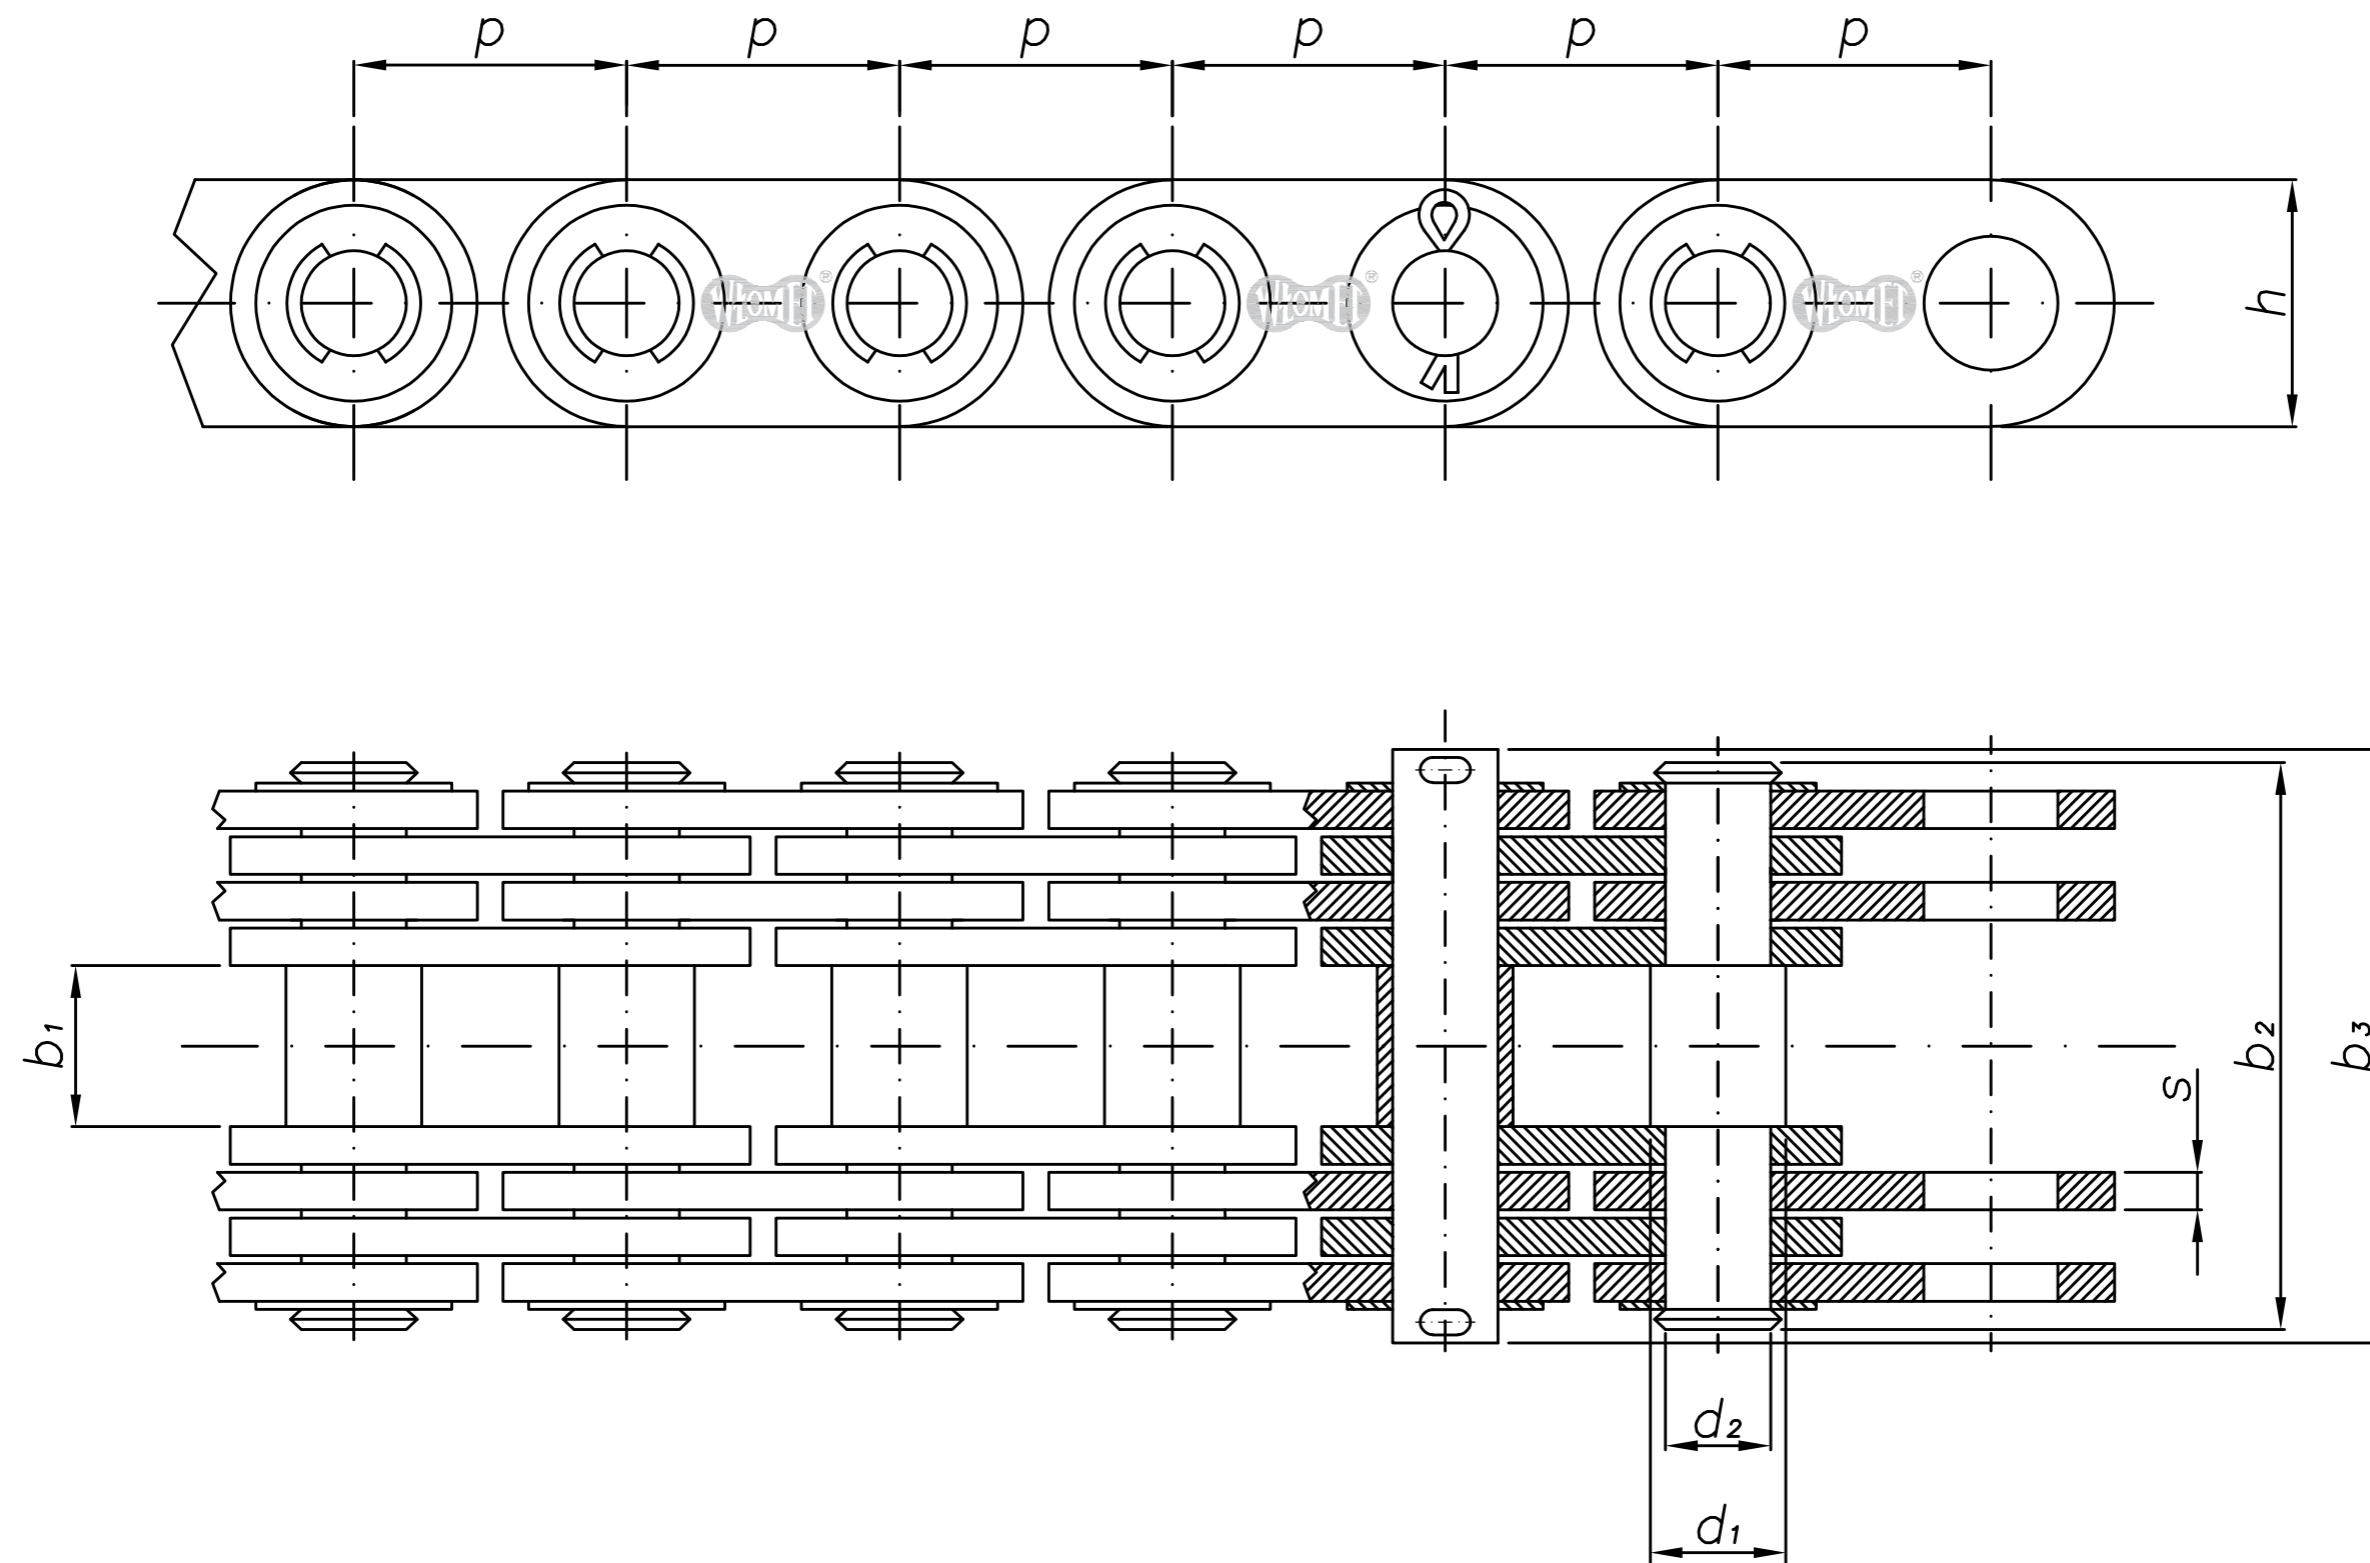

Łańcuchy sworzniowe typ C

Gall's chains type C

PN-74/M -84110, DIN 8150

p	d ₁	d ₂ max	b ₁ min	b ₂ max	b ₃ max	h max	s max	Liczba płytek	F min	Q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
1	2	3	4	5	6	7	8	9	10	11
Sworznie nitowane z podkładkami										
80,00	36,00	32,00	60,00	159,00	171,00	60,00	6,00	6	500,00	38,20
90,00	40,00	36,00	70,00	184,00	200,00	70,00	7,00	6	750,00	53,00
100,00	45,00	40,00	80,00	224,00	239,00	80,00	8,00	8	1 000,00	76,60
120,00	55,00	50,00	100,00	262,00	277,00	100,00	8,00	8	1 500,00	112,00

F – obciążenie zrywające (min.)

Q – masa 1 mb łańcucha

F – breaking load (min.)

Q – weight kg/m