


Łańcuchy sworzniowe typ C  
Gall's chains type C  
PN-74/M-84110, DIN 8150  
Sworznie nitowane z podkładkami  
With washers

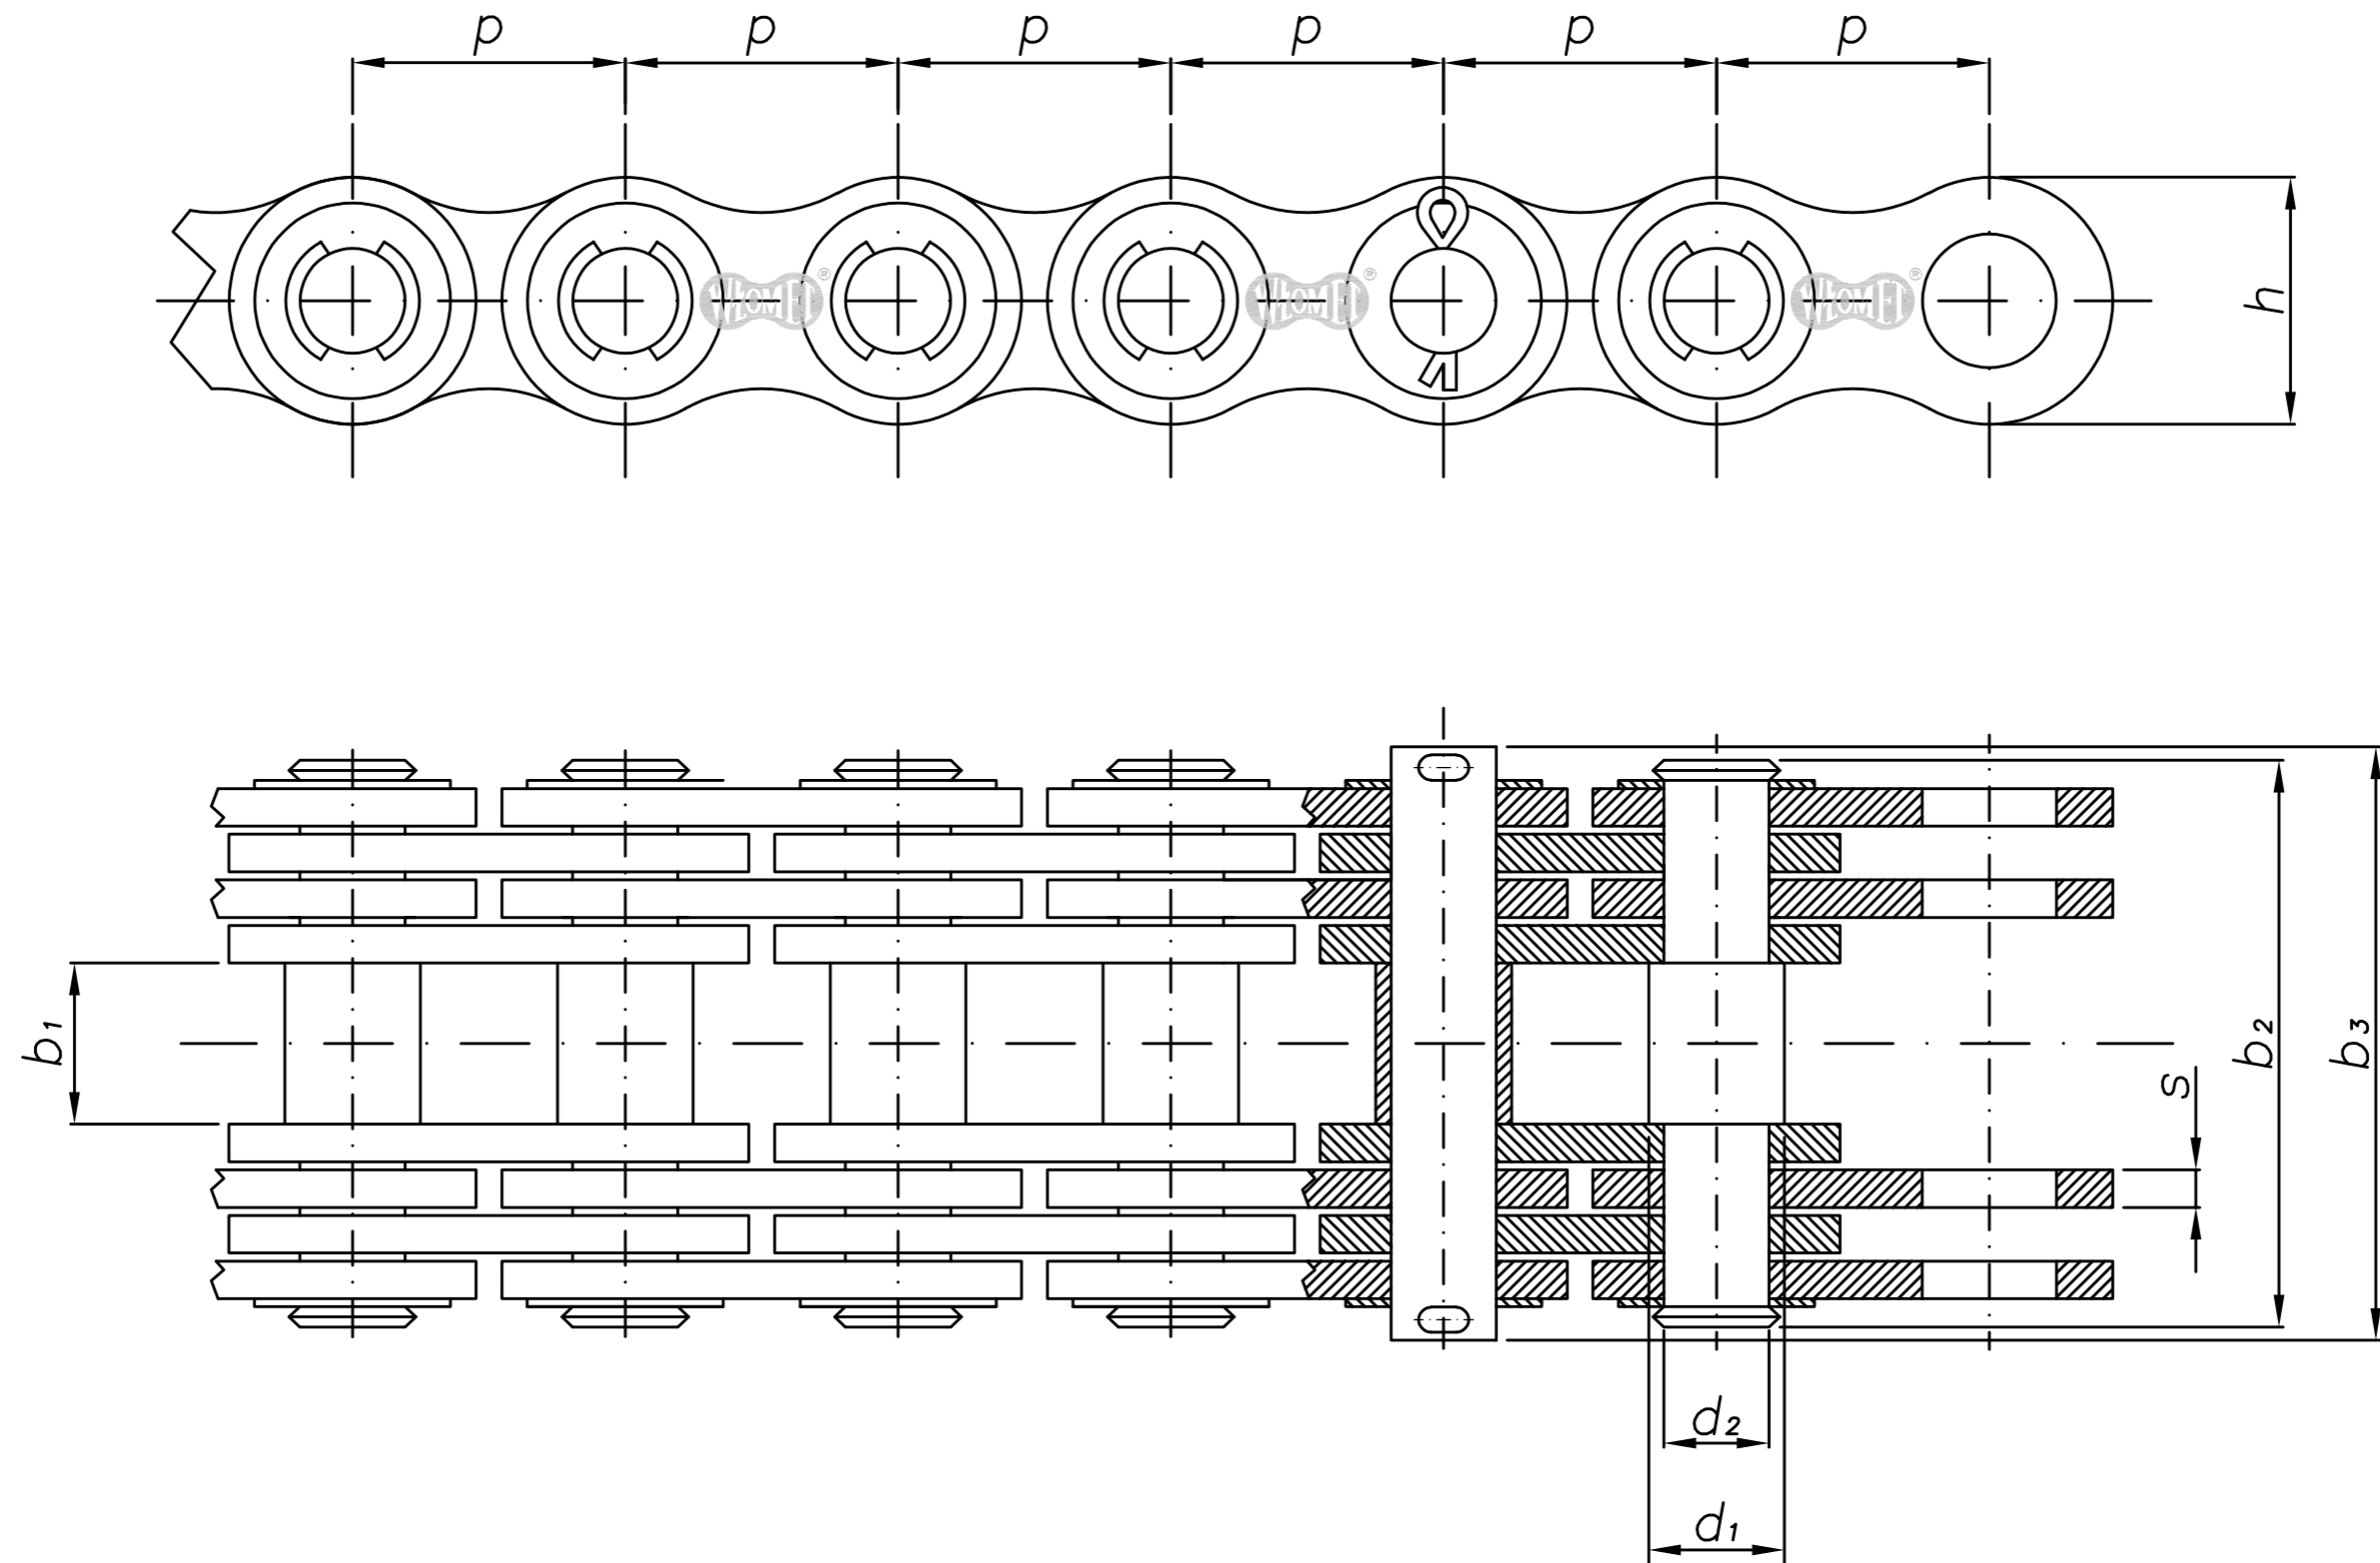

## Łańcuchy sworzniowe typ C

### *Gall's chains type C*

PN-74/M -84110, DIN 8150

p	d <sub>1</sub>	d <sub>2</sub> max	b <sub>1</sub> min	b <sub>2</sub> max	b <sub>3</sub> max	h max	s max	Liczba płytek	F min	Q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
1	2	3	4	5	6	7	8	9	10	11
Sworznie nitowane z podkładkami										
50,00	22,00	18,00	35,00	90,00	97,00	38,00	4,50	4	150,00	10,60
55,00	24,00	21,00	40,00	108,00	115,00	40,00	6,00	4	200,00	15,50
60,00	26,00	23,00	45,00	114,00	120,00	45,00	6,00	4	250,00	18,00
70,00	32,00	28,00	50,00	148,00	157,00	55,00	6,00	6	375,00	33,50

F – obciążenie zrywające (min.)

Q – masa 1 mb łańcucha

F – breaking load (min.)

Q – weight kg/m