


Łańcuchy rolkowe B1

Roller chains

PN-77/M-84168, DIN 8187, ISO R606

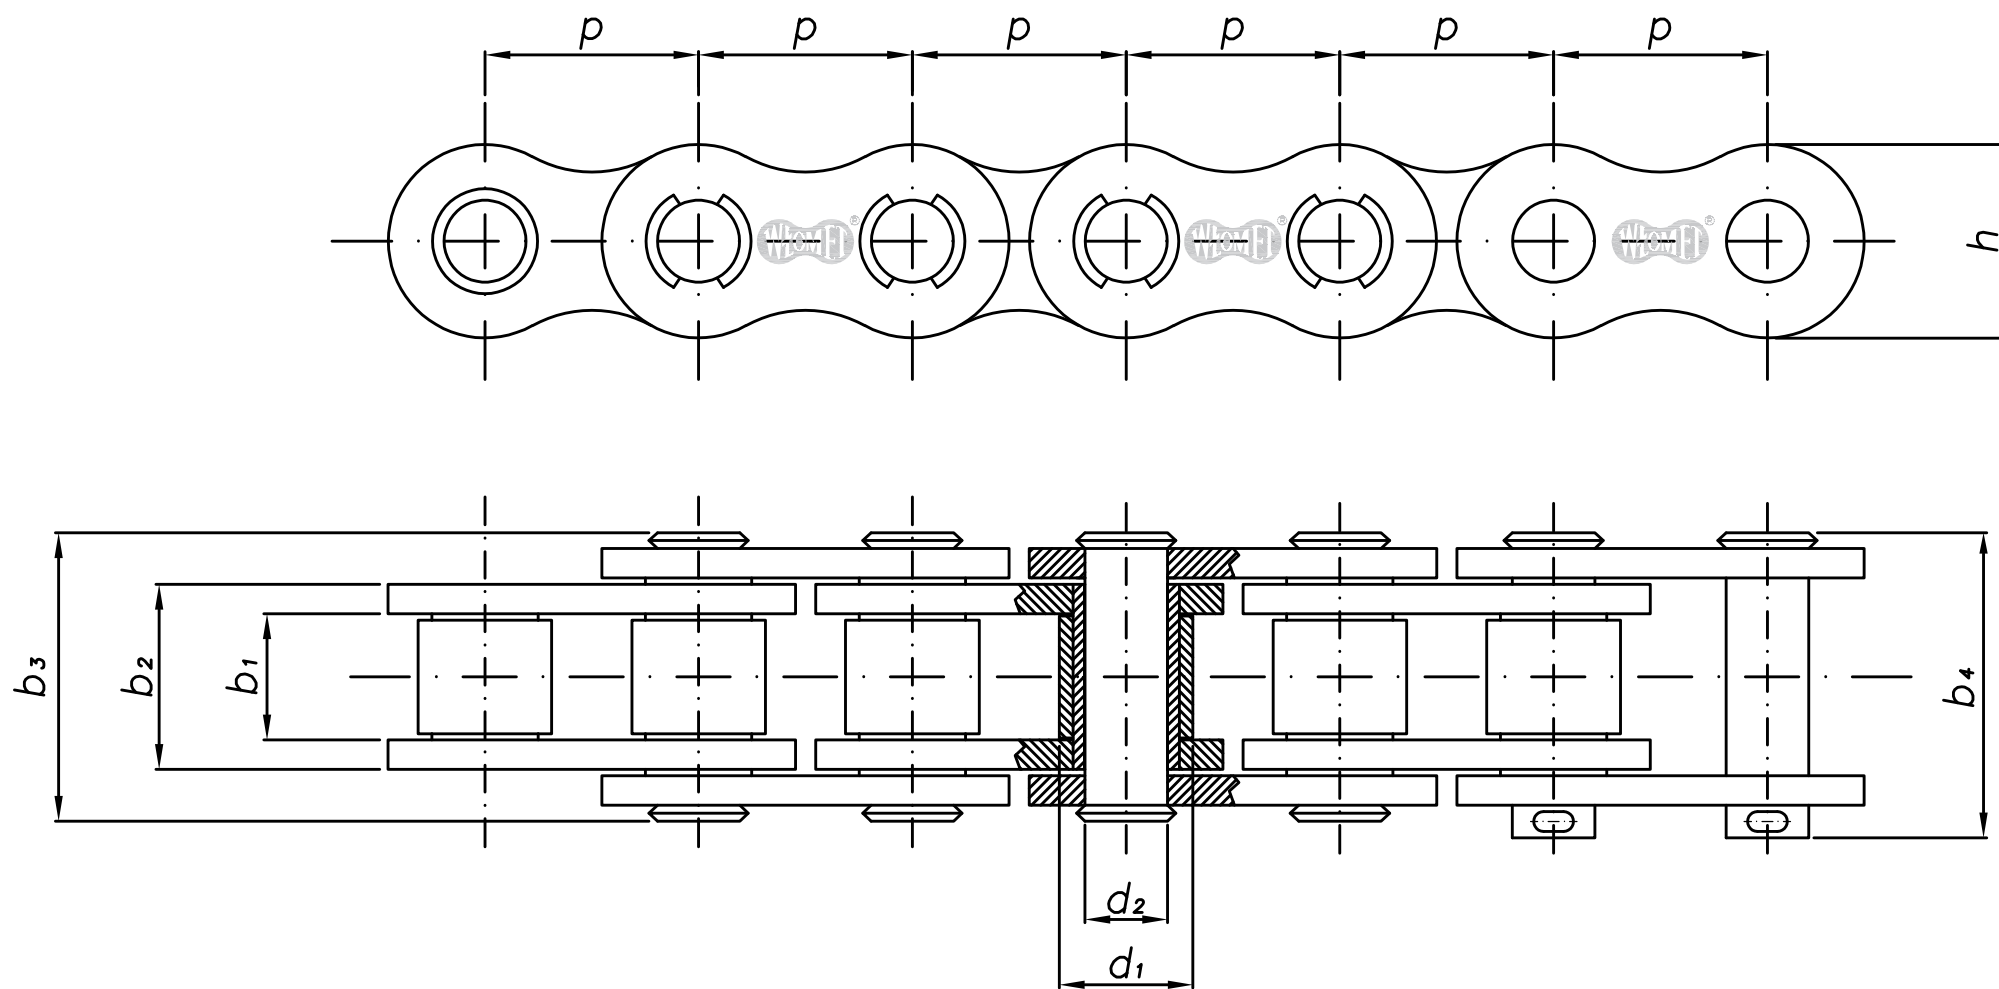

Łańcuchy rolkowe

Roller chains

PN-77/M -84168, DIN 8187, ISO-R606

ISO Nr.	p	d ₁ max	d ₂ max	b ₁ min	b ₂ max	b ₃ max	b ₄ max	h max	F min	Q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
1	2	3	4	5	6	7	8	9	10	11
04 B1	6,00	4,00	1,85	2,80	4,10	7,40	10,30	5,00	3,00	0,12
05 B1	8,00	5,00	2,31	3,00	4,77	8,60	11,70	7,11	4,60	0,18
06 B1	9,525	6,35	3,28	5,72	8,53	13,50	16,80	8,26	9,10	0,41
08 B1	12,70	8,51	4,45	7,75	11,30	17,00	20,90	11,81	18,20	0,70
081 B1	12,70	7,75	3,66	3,30	5,80	10,20	11,70	9,91	8,20	0,30
082 B1	12,70	7,75	3,66	2,38	4,60	8,20	10,00	9,91	10,00	0,26
083 B1	12,70	7,75	4,09	4,88	7,90	12,90	14,40	10,30	8,40	0,37
084 B1	12,70	7,75	4,09	4,88	8,80	14,80	16,30	11,15	10,50	0,48
085 B1	12,70	7,77	3,58	6,40	9,07	14,00	16,00	9,91	15,75	0,52
10 B1	15,875	10,16	5,08	9,65	13,28	19,60	23,70	13,72	22,70	0,95
12 B1	19,05	12,07	5,72	11,68	15,62	22,70	27,30	16,13	29,50	1,25
16 B1	25,40	15,88	8,28	17,02	25,45	36,10	41,50	21,08	58,00	2,70
20 B1	31,75	19,05	10,19	19,56	29,01	43,20	49,30	26,42	95,00	3,60
24 B1	38,10	25,40	14,63	25,40	37,92	53,40	60,00	33,40	170,00	6,70
28 B1	44,45	27,94	15,90	30,99	46,58	65,10	72,50	37,08	200,00	8,30
32 B1	50,80	29,21	17,81	30,99	45,57	67,40	75,30	42,29	260,00	10,50
40 B1	63,50	39,37	22,89	38,10	55,75	82,60	92,80	52,96	360,00	16,00
48 B1	76,20	48,26	29,24	45,72	70,56	99,10	109,60	63,88	560,00	25,00
56 B1	88,90	53,98	34,32	53,34	81,33	114,60	126,30	77,85	850,00	38,00
64 B1	101,60	63,50	39,40	60,96	92,02	130,90	144,00	90,17	1 100,00	60,00

F – obciążenie zrywające (min.)

Q – masa 1 mb łańcucha

F – breaking load (min.)

Q – weight kg/m