
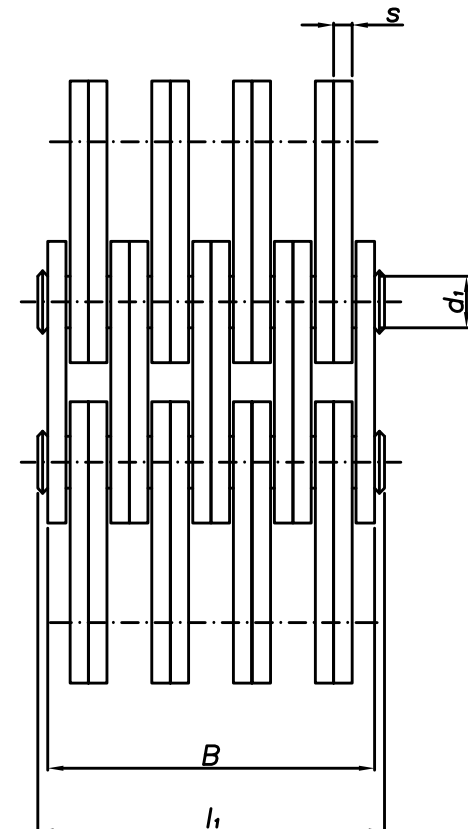
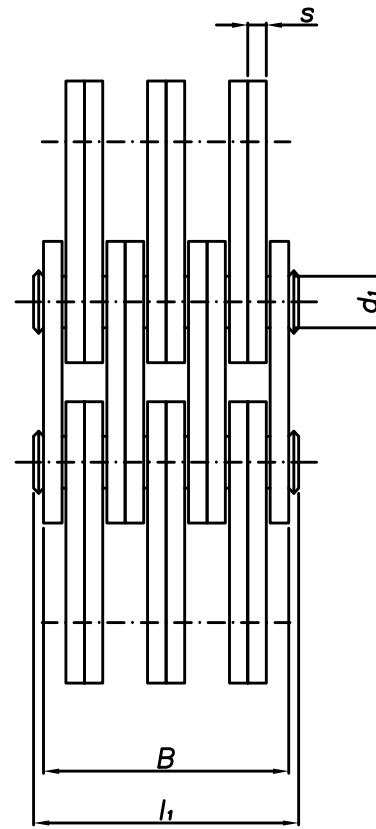
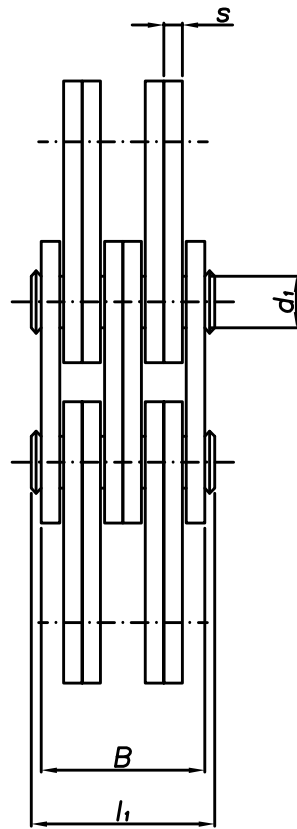
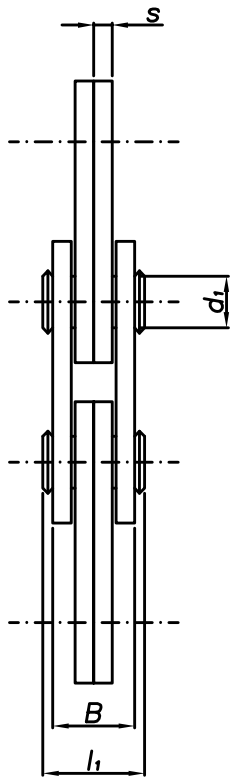


Łańcuchy płytowe Fleyer'a
Fleyer plate chains
DIN 8152

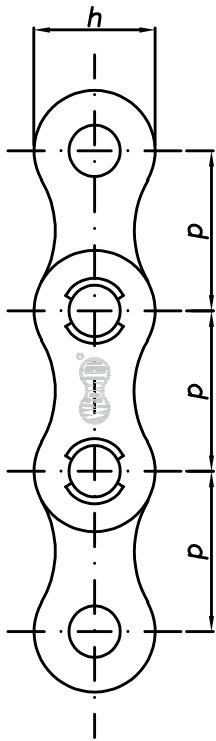

Łańcuchy płytkowe Fleyer'a

Fleyer plate chains

DIN 8152

p	d ₁ max	h max	s max	Układ płytek	B max	l ₁ max	F min	Q
mm	mm	mm	mm	mm	mm	mm	kN	kg/m
1	2	3	4	5	6	7	8	9
5/8" 15,875	5,08	12,60	1,65	2x2 4x4 6x6	7,80 14,50 21,50	10,00 17,10 24,10	26,00 50,00 78,00	0,50 0,96 1,40
3/4" 19,05	5,72	14,70	1,83	2x2 4x4 6x6	7,80 15,20 22,60	10,70 18,10 25,40	33,00 66,00 99,00	0,60 1,15 1,70
1" 25,40	8,28	21,10	3,00	2x2 4x4 6x6	12,80 25,60 37,50	17,20 29,30 41,30	70,00 140,00 210,00	1,56 3,10 4,50
1 ¼" 31,75	10,19	25,40	3,75	2x2 4x4 6x6	16,00 32,00 48,00	20,30 36,50 51,50	105,00 210,00 315,00	2,00 4,00 5,80
1 ½" 38,10	14,63	33,40	5,00	2x2 4x4 6x6	21,00 42,00 62,00	26,50 46,50 67,50	175,00 350,00 525,00	4,20 8,50 12,20
1 ¾" 44,45	15,90	40,00	6,00	2x2 4x4 6x6	25,00 50,00 75,00	30,50 54,50 80,50	210,00 410,00 605,00	6,25 12,20 18,20
2" 50,80	17,81	43,00	6,00	2x2 4x4 6x6 8x8	25,00 50,00 75,00 100,00	30,50 54,50 80,50 105,50	265,00 530,00 800,00 1050,00	6,80 13,10 19,50 25,80

F – obciążenie zrywające (min.)

Q – masa 1 mb łańcucha

F – breaking load (min.)

Q – weight of 1 metre of chain